


REV.	DESCRIPTION	DATE	APPROVED
NC	INITIAL RELEASE		
A	REV PER ECN: 5108		

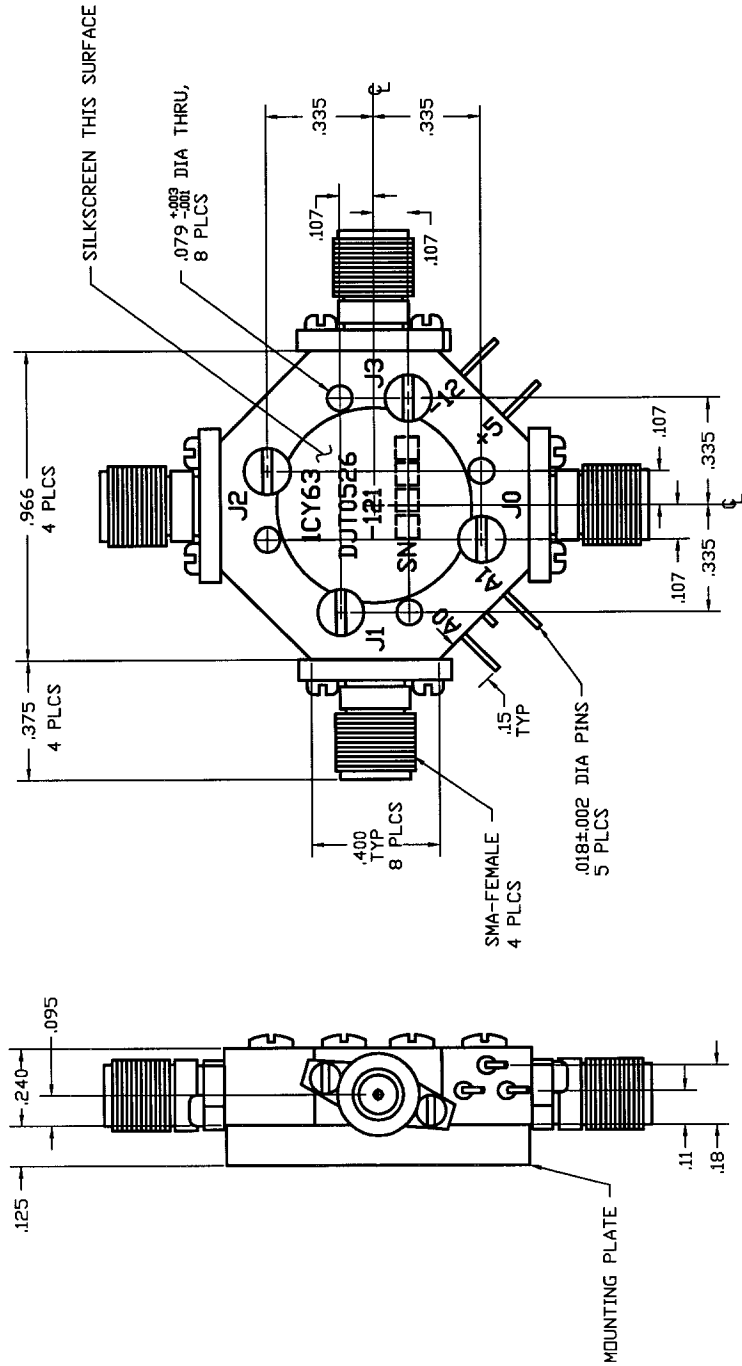

**SPECIFICATIONS:**

- FREQUENCY: 0.5-26.5 GHz
- INSERTION LOSS: 3.7 dB MAX.
- ISOLATION: 18.0-26.5 GHz
- VSWR(50 OHM): 2.3:1 MAX.
- SWITCHING SPEED: 70 dB MIN.
- BIAS: +5V AT 60 mA MAX.
- 12V AT 40 mA MAX.

TTL LOGIC TABLE:

INS.	A0	A1
LOSS	J1	0 0
	J2	1 0
	J3	0 1

- OPERATING TEMP. RANGE: -54° TO +100°C
- STORAGE TEMP. RANGE: -54° TO +100°C

<b>SMT</b> SIERRA MICROWAVE TECHNOLOGY	
OUTLINE FOR DJT0526-121	
SIZE	FSCM NO. DWG. NO. REV.
B	1CY63 605-0259-001
SCALE	

FRACTIONS DECIMALS ANGLES	DATE
XXX.XX ±	
XXX.XX ±	
XXX.XX ±	
MATERIAL	APPROVALS
	DRAWN
	CHECKED
	ISSUED
FINISH	
603-0038-001 DJT0526-121	
NEXT ASSY USED ON	
APPLICATION	