COMPUTER GENERATED DRAWING
MANUAL CHANGES NOT AUTHORIZED

REVISIONS			
REV.	DESCRIPTION	DATE	RELEASED BY
NC	INITIAL RELEASE	2-6-96	T.R.
A	REV PER ECN: 5515 & 6966		

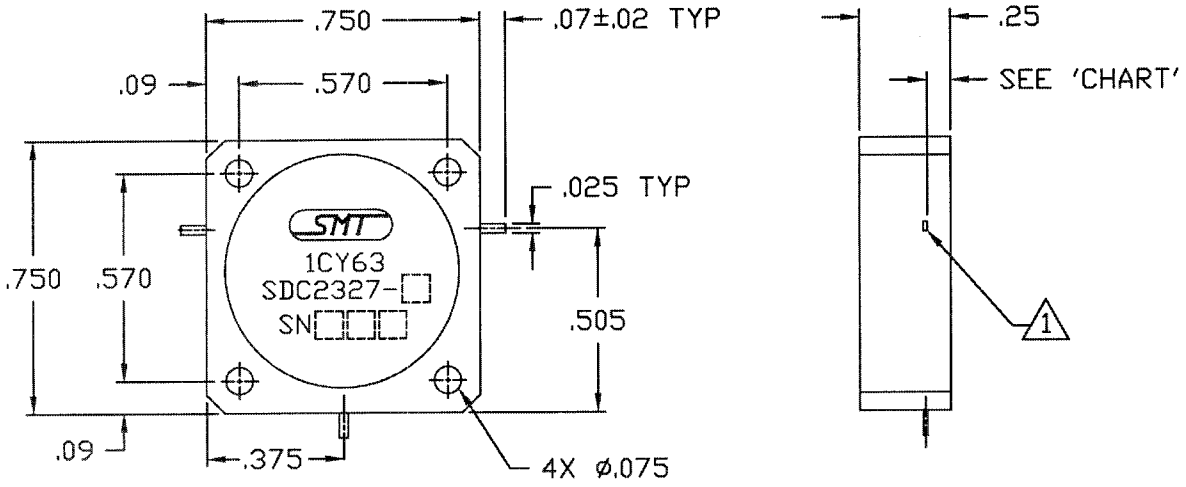

SPECIFICATIONS:

1. FREQUENCY RANGE — 2.30 TO 2.70 GHz
2. INSERTION LOSS — 0.5 dB MAX
3. VSWR — 1.30:1 MAX
4. TEMPERATURE:
   - OPERATING — -40° TO +85°C
   - STORAGE — -54° TO +100°C

TAB HEIGHT TABLE	
OPTION NO.	HEIGHT (NOM.)
A	.065
B	.075
C	.090
D	.100
E	.120

NOTES:

1. TABS ARE .005±.001 THK Be Cu GOLD PLATED.
2. CASE: STAINLESS STEEL NICKEL PLATED.
3. CIRCULATION IS CLOCKWISE.

ITEM	QTY REQ'D	FSCM NO.	PART OR IDENTIFICATION NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION

PARTS LIST

LIST OF MAT'L	USED ON
203-0136-001	SDC2327-X

APPLICATION

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
FRACTIONS ± DECIMALS .XX± .01 ANGLES ± 0.5
.XXX± .005

MATERIAL:

FINISH:

DO NOT SCALE DRAWING

CONTRACT NO.

APPROVALS		DATE
DRAWN:	S. REED	2-6-96
CHECKED:		
DESIGN APP.	T.RODRIGUEZ	2-6-96
MAT. & PROCESSES		
Q.A.		

SIERRA MICROWAVE TECHNOLOGY

TITLE: OUTLINE FOR SDC2327-X

SIZE	FSCM NO.	DWG NO.	REV
B	1CY63	205-2242-001	A

BHDR SCALE | SHEET OF