



REVISIONS		
REV.	DESCRIPTION	DATE
NC	INITIAL RELEASE	

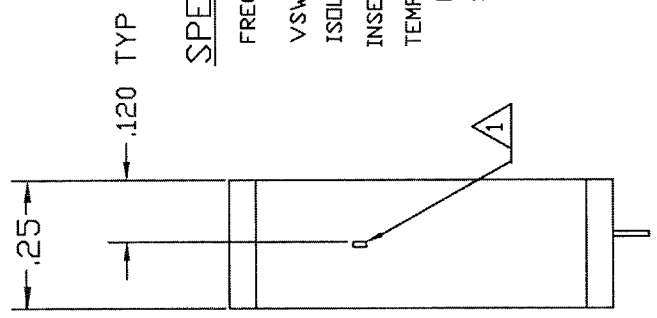

SPECIFICATIONS

FREQUENCY RANGE: 2.70-3.0 GHz
 VSWR 1.25:1
 ISOLATION 20 dB MIN
 INSERTION LOSS: 0.4 dB MAX
 TEMPERATURE OPERATING: -54°C TO +100°C
 STORAGE: -54°C TO +100°C

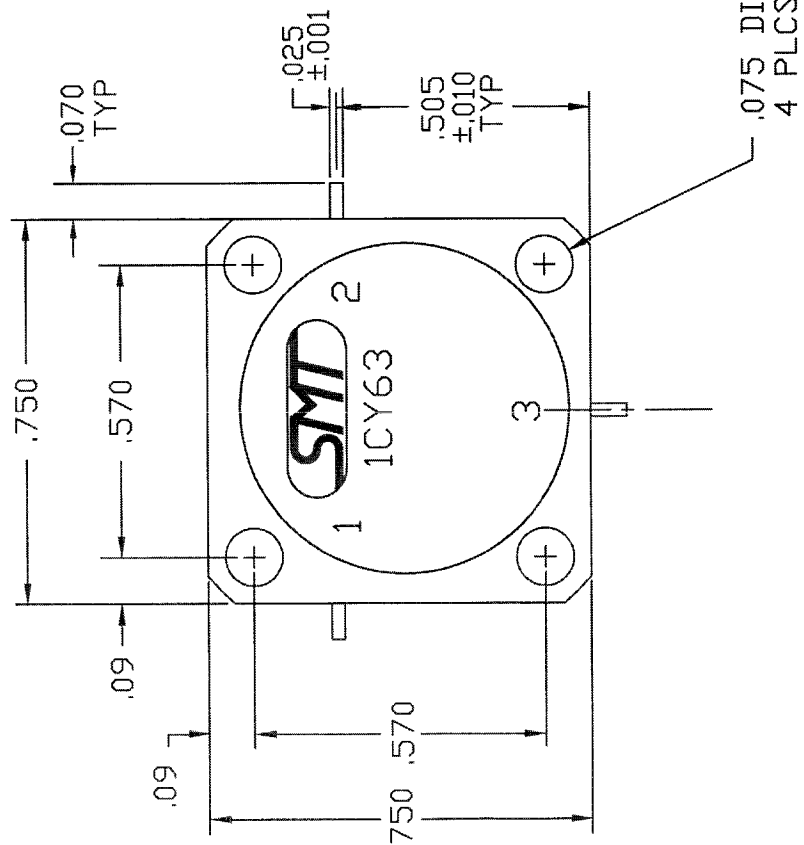

- 2. CASE: STAINLESS STEEL NICKEL PLATED.
- 1. TABS ARE .005±.001 THK. Be Cu, GOLD PLATED.

NOTES:

QTY	FSCH RECD NO.	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION
PARTS LIST				
FRACTIONS DECIMALS ANGLES ± .XXX .01 ±		APPROVALS DATE		
MATERIAL XXXE .005		DRAWN		
FINISH		CHECKED		
203-0122-001		ISSUED		
NEXT ASSY		SCALE		
SDC2730-E		SHEET		
USED ON		REV.		
APPLICATION		205-2037-001		
		SIERRA MICROWAVE TECHNOLOGY		
		OUTLINE FOR SDC2730-E		
		SIZE FSCH NO. DWG. NO.		
		B 1CY63 205-2037-001		